

Shine POS



Fan-less Touchscreen Terminal



Introduction:

Born to be shined, and brighten the place where it is placed, with its elegant and delicate curve and appearance, and sexy rear, we called it "Shine POS".

Not only equipped with a stable printer module, easy access USB port, and rich I/O, she even comes with many system boards to support different platform requests, and various display and touch screens.

Small footprint and with sturdy operating stand, Shine POS satisfies all your needs.

Features:

- Polished plastic with great texture.
- Fan-less design for specific platforms.
- Compact touch and display monitor with no ventilation holes.
- Small footprint with compact size.
- Support different platforms and screens.
- Invisible wiring with smart cable management.



GloriousLink

More Info: <https://www.gloriouslink.com>; E-mail: jason_hsu@gloriouslink.com

Application:



GloriousLink

More Info: <https://www.gloriouslink.com>; E-mail: jason_hsu@gloriouslink.com

Specifications:

	Model	SP-J1900	SP-RK3288	SP-RK3568		
System	CPU	Intel® Celeron® J1900 (2M Cache, up to 2.42 GHz)	Quad-core Cortex-A17 up to 1.8GHz	Quad-core Cortex-A55 up to 2.0GHz		
	RAM	4G / 8G (DDR3L)	2G / 4G			
Storage	SSD / EMMC	128G / 256G / 512G	8G / 128G			
OS	Operating Systems	Win 10 IoT Enterprise / Linux	Android 7.1	Android 11		
Display	Type	Support 10.1", 12.1", 15.6", 15", 17" LED Backlit LCD Display				
	Resolution	10.1": 1024 x 600 200 nits or 1280 x 800 330 nits (optional) 12.1": 1280 x 800 400 nits 15.6": 1366 x 768 220 nits 15": 1024 × 768 350 nits 17": 1280 x 1024 250 nits				
		Brightness	As above.			
			Type	Projected Capacitive Touch		
I/O			Standard I/O	2 x USB 2.0	4 x USB 2.0	3 x USB 2.0
	2 x USB 3.0	1 x LAN (10/100/1000)		1 x mini USB		
	1 x COM	1 x DC 12V In		1 x mini HDMI		
	1 x LAN (10/100/1000)	1 x SIM card slot		1 x LAN (10/100/1000)		
	1 x VGA	1 x HP/MIC Jack		1 x DC 12V In		
	1 x DC 12V In	1 x RJ11(Cashdrawer)		1 x TF card slot		
	1 x MIC-in			1 x HP/MIC Jack		
I/O	Standard I/O	1 x Line-out		1 x RJ11(Cashdrawer)		
		Buttons	1 x Power On/Off Button			
		LED	1 x Power status indicator			
		Extension Kits (Optional)	VFD Customer Display / LCM Customer Display / 15.6" 2nd Display			
Power	Adapter	External DC Power Adapter 60W, 12V / 5A				
Mechanical	packaging volume	470 x 310 x 480 mm (18.5*12.2*18.9 in)				
	Gross weight (Single screen)	10.1": 6 kg (13.23 lb) 12.1": 6.8 kg (15 lb) 15.6": 9 kg (19.85 lb) 15": 8.5 kg (18.74 lb) 17": 10 kg (22.04 lb)				
		Gross weight (Dual screen)	10.1": 7.5 kg (16.53 lb) 12.1": 8 kg (17.64 lb) 15.6": 11 kg (24.25 lb) 15": 12.5 kg (27.56 lb)			
			Gross weight (Dual screen)			
				Gross weight (Dual screen)		
	Gross weight (Dual screen)					
		Gross weight (Dual screen)				



GloriousLink

More Info: <https://www.gloriouslink.com>; E-mail: jason_hsu@gloriouslink.com

Dimension:

10.1-inch




12.1-inch



GloriousLink

More Info: <https://www.gloriouslink.com>; E-mail: jason_hsu@gloriouslink.com

15-inch

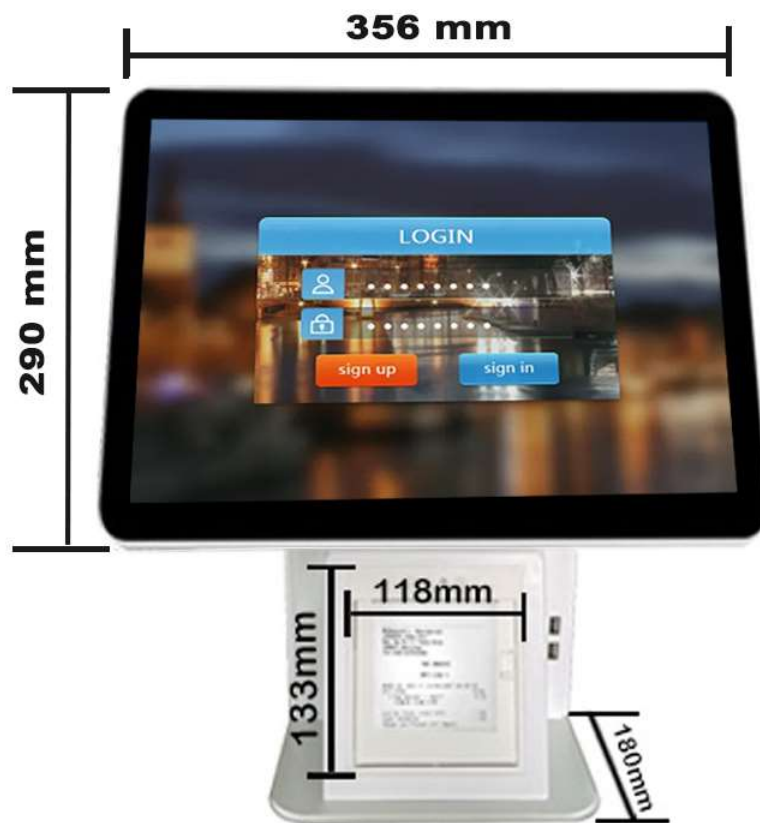

15.6-inch



GloriousLink

More Info: <https://www.gloriouslink.com>; E-mail: jason_hsu@gloriouslink.com

17-inch



GloriousLink

More Info: <https://www.gloriouslink.com>; E-mail: jason_hsu@gloriouslink.com