Wit POS Wide

15.6" Fan-less Touchscreen Terminal Powered by Intel® Processor and Rockchip






- Aluminum alloy housing, good quality, fast heat dissipation.
- Super slim and compact appearance with excellent texture.
- No ventilation hole with easy motherboard and RAM access design.
- Neat motherboard wiring plan.
- Easy change design on SSD and M.2.
- Support up to 4 COM or 8 USB.
- Hidden cables with good cable management, Overall simplicity.
- Easy MSR installed design.
- Easy integrated VFD or secondary screen.
- Foldable metal stand provides incredible stable while touching.



Introduction:

The true flat Wit POS Wide Touch Terminal is equipped with a rugged aluminum alloy housing and a great fan-less design, which can withstand harsh environments and the most demanding field applications. It also provides a variety of peripheral equipment support, including MSR, fingerprint reader, second display and customer display, and can be equipped with a variety of Intel and ARM processors to ensure excellent performance and enhance customer experience.


Designed with foldable stand and tiltable hinge, smart to support different operating height to support different operating angle requests.








More Features:

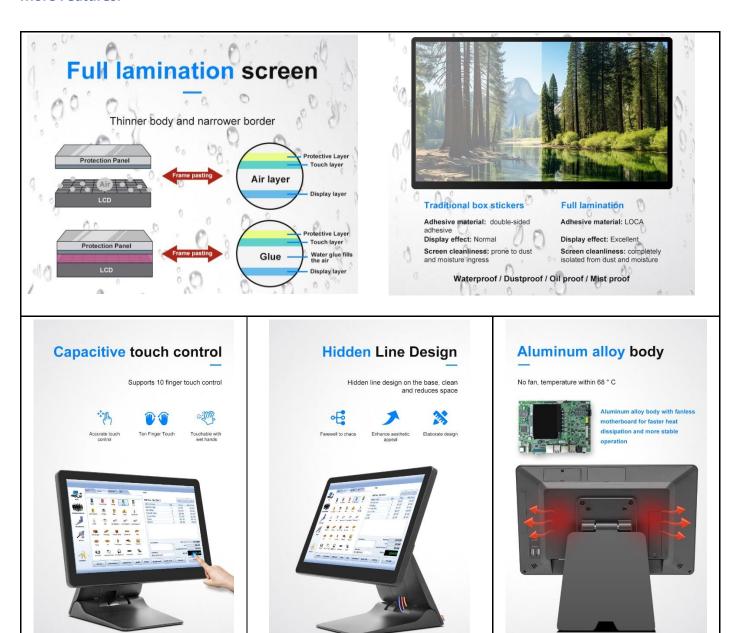

Different Configuration:

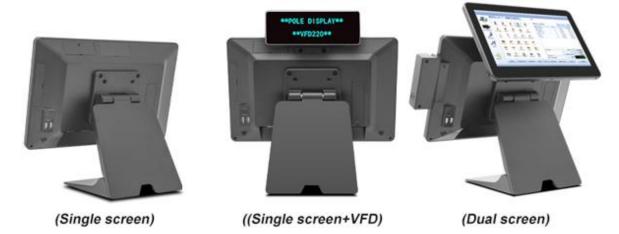



Application:


















3 colors available:



*Black color is the default.

Specifications:

	Model	GW516-J6412	GW516-i3	GW516-i3	GW516-i5	GW516-i5	GW516-RK3568
System		Intel® Celeron®	8th Generation	11th Gen.	6th Generation	8th Generation	Quad-core
	СРИ	J6412	Intel® Core™	Intel® Core™	Intel® Core™	Intel® Core™	Cortex-A55
			i3-8130U	i3-1115G4	i5-6300U	i5-8260U	up to 2.0GHz
	RAM	4G/8G/16G	4G/8G/16G	4G/8G/16G	4G/8G/16G	4G/8G/16G	2G
Storage	SSD	128G/ 256G/ 500G 16G					
os	Operating Systems	Win 11 IoT Enterprise / Linux					Android 11
Display	Туре	15.6" LED Backlit LCD Display					
	Resolution	1366 x 768 (default) / 1920 x1080					
	Brightness	300 cd/m²					
Touchscreen	Туре	Projected Capacitive Touch					
I/O	Standard I/O	2 x USB 2.0 2 x USB 3.0 4 x RS-232 2 x RS-232 (0V/5V/12V) (0V/5V/12V) 1 x LAN (10/100/1000) 1 x LAN 1 x VGA/ 1 x HDMI (10/100/1000) 1 x RJ11 1 x MIC-in 1 x RJ11 1 x Line-out 1 x DC 12V In 1 x Line-out 1 x Line-out Note: 2 additional USB ports and 2 additional COM (RJ50) ports are optional to discuss.					1 x HDMI 1 x USB 1 x LAN 2 x USB3.0 1 x RJ11 DK Port 1 x TF Card 1 x DC 12V in
	Buttons	1 x Power On/Off Button					
	LED	1 x Power status indicator					
	Extension Kits	(Optional) MSR Card Reader / RFID Reader / i-Button Reader / VFD Customer Display / 9.7" or 11.6" or 15" 2nd Display					
Power	Adapter	External DC Power Adapter 60W, 12V / 5A					
Mechanical	packaging	Single pack: 450*175*420 mm					
	Net weight	Single pack: 6 kg					
	Gross weight	Single pack: 7 kg					