

GloriousLink Kiosk Datasheet

GK07 series

Dual-screen Metal Housing Kiosk

The dual-screen metal housing supports more display or touch combinations on big screen requests up to 23.8 inches. With well-integrated function support, the kiosk can support a camera, scanner, printer, and EFTPOS holder, available with Windows-based or Android-based, perfectly for fast food, supermarkets, hotels, shopping malls, airports, and any indoor public place. An easily integrated structure allows the system integrator to adjust their required screen in seconds.

GK07 can also support wall-mount, and floor-standing, while the desktop is the basic.

Metal-housing design is perfect for the non-attendance environment while providing higher performance operating silently.



Features

- This product has passed the relevant industry certification, with the characteristics of high reliability, stability and quality.
- Up to 23.8-inch, dual screen, metal housing.
- Desktop, wall-mount, standalone is available to opt.
- FHD display, which has convenient operation and flexible clear pictures of stability.
- It can be flexibly to selected the system module function.
- The appearance of the whole machine can be customized according to requirements.
- SDK development materials in all modules are provided.



Fully-integrated



Different Views 23.8" front+15.6" rear



(Front single screen)



(Side view angle)




(Back dual screen)

Easy Design

Screens easy integration design	
Easy access and connectivity	
Fanless design	

Optional Function Modules

Main LCD Panel	From 15-inch to 23.8-inch, LCD or touch is available to opt
Rear LCD Panel	From 15-inch to 23.8-inch, LCD or touch is available to opt
System board	Integrated industrial control professional motherboard; Intel / I3 / I5 / I7 processors are available, supporting up to Windows 11 Android smart motherboard is optional, supporting OS: up to Android 13
Receipt printer	Panel type line thermal printer. Printing width 80 mm , paper cutting mode, inclusive of full cut or half cut, Support paper-lack alarm, blocking function.
QR/bar scanner	Automatic inductive trigger type scanner, support conventional one-dimensional code, two- dimensional code scanning.
POS holder	Can stretch and adjust to different sizes.
Camera	2M pixels.

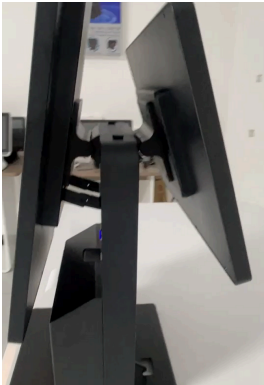Dual or Single screen design	Scanner and Printer
	


Other Parameters

Operating temperature	-10°C—60°C
Storage temperature	-20°C—70°C

Weight	N.W.: 16kgs (single front screen desktop version)
Overall Dimensions	As below
Accessories	power adapter/ power cable *1
Stand info (estimated)	Stand: 243.5*1022*112.9 mm/ Base: 490*330 mm N.W.: 23kgs

Dimensions

23.8" front+15.6" rear

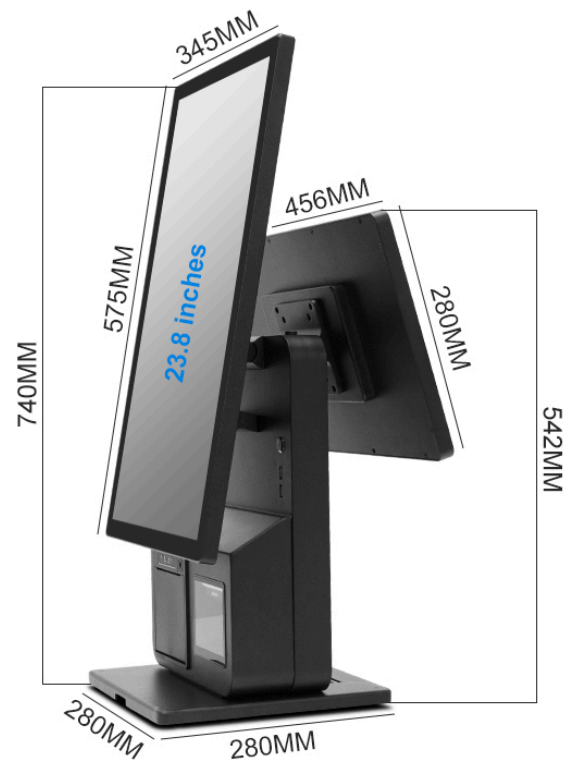

Document Information

Prepared by:

GLi Taipei PM team

File Name:

Datasheet_kiosk_GK07

Date: Jan. 6, 2025



GloriousLink Int'l

More info: <http://www.gloriouslink.com> ; E-mail: support@gloriouslink.com